

UTP CAT.6 KEYSTONE JACK TOOL FREE



Category 6 tool free RJ-45 keystone jacks exceed the transmission line performance requirements of IEC and TIA for CLASS E/Category 6 systems. The jacks have been designed for mechanical and electrical reliability, using quality materials, to deliver a jack solution that minimises the time required by the installer to complete each termination. Each Category 6 tool free RJ-45 keystone jacks comply with IEC 60603-7-Pt 4 (unscreened) and support all applications designed for CLASS E networks, as defined within ISO/IEC 11801 (2nd Edition):2010 including ATM 1200, 1000BASET (Gigabit Ethernet) and 1G FCBASE-T.

FEATURES

- > Unscreened versions available
- > Repeatable tool-free terminations
- > Colour coded stuffer-cap for easy cable lacing
- > Colour coded wiring blocks for easy cable lacing
- > Keyed stuffer-cap for reliable termination
- Low insertion force `clam action` assists tool-free termination
- > Integral cable strain relief
- > Durability:
 - > Jack contacts: 750 plug insertion cycles minimum
 - > Wiring block: 25 termination cycles minimum
- Fits all keystone style face plates and floor boxes
- > Suitable for modular patch panel installation

APPLICATIONS

- Class E/category 6 standards compliant
- > Independent third party verified performance
- > Terminates 22AWG to 26AWG cables

STANDARDS COMPLIANCE

- > Electrically compliant through 250MHz
- > Supports TIA 568 A & B wiring configurations
- REACH / SvHC compliant regulation (EC) No. 1907/2006

ORDERING INFORMATIONS


DESCRIPTION	PART NO.
UTP Cat.6 Keystone jack 180 degree Black TF	JBF-JU6-B-TF
UTP Cat.6 Keystone jack 180 degree White TF	JBF-JU6-W-TF


©JBF S.r.l. – Sede legale e operativa: Via Goretta 90 10079 Mappano (TO) - P. Iva e Codice Fiscale: 11367140016







CARATTERISTICHE TECNICHE

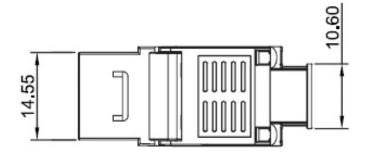



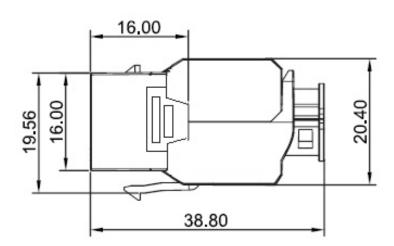



©JBF S.r.l. – Sede legale e operativa: Via Goretta 90 10079 Mappano (TO) - P. Iva e Codice Fiscale: 11367140016